


Model: NYLO NOIR POL.02 120X270(6)(A)

Codes: 100332539

Absorption: Bla - Porcelánico (E<=0.1%)

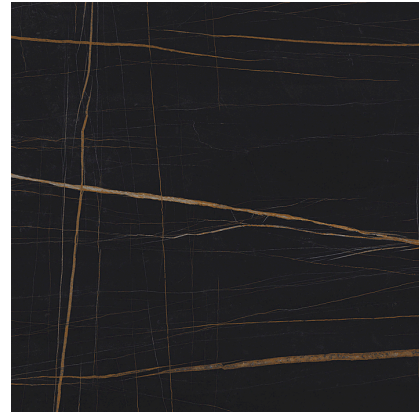

DIMENSIONAL FEATURES

UNE-EN ISO 10545-2

Length	2700 MM	
Thickness	6 MM	
Width	1200 MM	
Length and width deviation	Below 0.15%	+/-0.3%*
Side straightness deviation	Below 0.15%	+/-0.3%*
Squareness deviation	Below 0.15%	+/-0.3%*
Surface flatness deviation	Below 0.15%	+/-0.4%*

*ISO-13006:2015 UNE-EN 14411:2017

MECHANICAL FEATURES

UNE-EN ISO 10545-4-6-7-11

Breaking strenght	>1100 N	
Modulus of rupture	>45 N/MM2	
Abrasion resistance	<140	

*ISO-13006:2015 UNE-EN 14411:2017

HYGIENIC FEATURES

UNE-EN ISO 10545-13-14

Chemical resistance	MIN B	
Stain resistance	5	
Resistance to cold food products	SUITABLE	
Resistance to hot food products	SUITABLE	
Fastness to rubbing	SUITABLE	
Dimensional stability at elevated temperature	COMPLIANT	
Climate shock test. resistance index	RESISTS	
Resistance to thermal shock	RESISTE	
Flammability	A1	

*ISO-13006:2015 UNE-EN 14411:2017

System Certification



Do not use cleaning agents containing hydrofluoric acid.

It is recommended to fix tiles with a minimum joint of 1,5 mm. Do not fix without joint.

For big sizes, it is recommended to fix with mortars containing polymeric additives and to use the double gluing technique.

Mosaic tiles must be grouted.

This document is only commercial and cannot be used as expert opinion, documentary evidence or in any legal or administrative procedure unless authorized by PORCELANOSA S.A.

ANTI-SLIP VALUE

CEN/TS 41901/02, DIN-51130 y ASTM A137.1

Slip resistance (pendulum-wet)	CL0	
Resistance to bacteria	SUITABLE	
Resistance to cleaning products	SUITABLE	
Resistance to bathroom cleaning products	SUITABLE	
Resistance to cigarette burns	SUITABLE	
4s	DRY>36-LOW_WET<25-HIGH	
Slip resistance (pendulum-dry)	>45	

*ISO-13006:2015 UNE-EN 14411:2017

SCOPE OF USE

Technical code-1	Use on walls	
Technical code-2	No additional requirements	

PACKING

Sales units per box	3.240441 M2/BOX	
Sales units per pallet	71.289695 M2/PAL	
Sales units per unit	3.240441 M2/PIECE	

System Certification

